CR25LC Rechargeable Standard Motor

Two-way rechargeable radio motor for roller, Montage™ and Roman shades

01 Technical specifications

Battery	Built-in lithium-ion	**Charging port**	USB-C, 5 V DC
Rated torque	1.1 N·m	**Rated speed**	28 rpm
Max charging current	2 A	**Charging power**	10 W
Length L1 / L2	478 / 460 mm	**Limit type**	Electronic
Radio frequency	433.92 MHz	**Ingress protection**	IP20: indoor use only
Max limit turns	Unlimited	**Continuous run limit**	Over 6 min
Working temperature	0 °C to 40 °C	**Minimum shade width**	22″

02 Features

Built in

- ✓ Speed regulation and noise reduction
- ✓ Reversible direction
- ✓ Stall protection
- ✓ Built-in receiver
- ✓ Multiple stop positions
- ✓ Built-in lithium battery
- ✓ Jog mode
- ✓ P1 programming button
- ✓ Solar charging
- ✓ Battery capacity feedback

App control

- ✓ Battery check
- ✓ Percentage (position) control
- ✓ Status feedback
- ✓ Timer
- ✓ Radio signal indication
- ✓ Scenes
- ✓ Scan and program

Via the CBM Smart Network Bridge, Bond Bridge or Bond Bridge Pro.

03 Charging and accessories

DC10MC USB-C charger	5 V, 2 A, with 6′ cord
SP1288C solar panel	3 W, USB-C. Keeps the battery topped up (see PDS-SP1288C)
Magnetic charging cord	For USB-C motors
Magnetic pin	Fits the motor's USB-C port for the magnetic cord

04 Remotes



Handheld
CBT15H 15-channel
CBT01H single channel
CBT05ST 5-channel, timer



Surface mount
CBT15S 15-channel
CBT5MT 5-channel, timer



Wall mount
CBT15W 15-channel




Bond Sidekick
Gen 2 or newer
5-channel
Wall or handheld

05 Applications



Roller shade



Montage™ Designer Shade




Roman shade

CR25LC Rechargeable Standard Motor

Two-way rechargeable radio motor for roller, Montage™ and Roman shades

06 Dimensions and end gaps

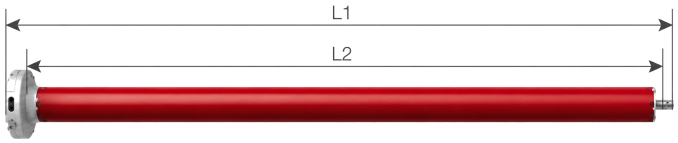

L1: 18-13/16″ [478]
L2: 18-1/8″ [460]

Mounting system	Brackets	Motor end	Pin end
3″/4″ square fascia	Brackets with covers	11/16″ [17]	5/8″ [16]
	Brackets without covers	9/16″ [14]	1/2″ [13]
S90 wrap cassette	—	13/16″ [21]	5/8″ [16]
S95 cassette, E90 enclosure	—	15/16″ [24]	3/4″ [19]
Round cassette C100, square cassette	—	3/4″ [19]	5/8″ [16]
Open roll	Open roll brackets (as chain drive)	11/16″ [17]	3/8″ [10]

Gap per end between the finished width and the fabric. Inches [millimetres].

07 System capacity

Width across (inches, cm), drop down (inches, cm). Minimum width 22″, maximum width 90″. Calculated for a 1-1/2″ tube, with a 750 g/m² blackout fabric and bottom rail, at 90% of rated torque.

in \ cm		**24** 61.0	**36** 91.4	**42** 106.7	**48** 121.9	**54** 137.2	**60** 152.4	**66** 167.6	**72** 182.9	**78** 198.1	**84** 213.4	**90** 228.6
30	76.2											
36	91.4											
42	106.7											
48	121.9											
54	137.2											
60	152.4											
66	167.6											
72	182.9											
78	198.1											
84	213.4											
90	228.6											
96	243.8											
102	259.1											
108	274.3											
114	289.6											
120	304.8											

Within motor capacity Exceeds motor capacity

08 Related documents

- CR25LC & CR28LC programming instructions (EN-FR), Rev 1.1
- PDS-SP1288C solar panel data sheet
- PDS-NB7006C Smart Network Bridge data sheet
- Roller-shade shop drawings, by mounting system